

ADVANTAGES OF BOHSLIDE 52

- Active leaf and glazing beads on the outside in order to get a better tightness.
- Optionally thermal insulated profiles for better thermal parameters.
- Optionally thermal insulated tempered glass acc. to DIN 614.
- Door can be hold in any position by turning the handle;
 Rotating handle does not collide with the construction at the maximum opening to hold the leaf in the open position.
- Non visible active leaf hooks sleek design, no visually disturbing elements.
- Glazing beads from outside improving tightness and stiffness.
- Door can be equipped with "Child lock" knob; Child Lock placed at a safe height additional lock, which blocks the handle
 and also is an extra burglarproof device.
- Clamp-on design easy and quick installation proces no welding, no drilling.
- Magnetic sensor as an option triggering air condition to avoid unnecessary waste of energy.
- Clean opening no protruding elements.
- Flat doorstep design.
- Watertight/ weathertight construction.
- All profiles preanodised and powder painted for marine environment (RAL/NCS).
- Integration with LED ligth or speaker possible.
- Integration with optional sidelights.






Material:

aluminum ENAW-6060 T66, acc. to EN 755-2, EN 573.

Surface treatment:

powder painting - RAL and NCS colours; anodizing,

TYPES AVAILABLE IN BOHSLIDE 52 SERIES

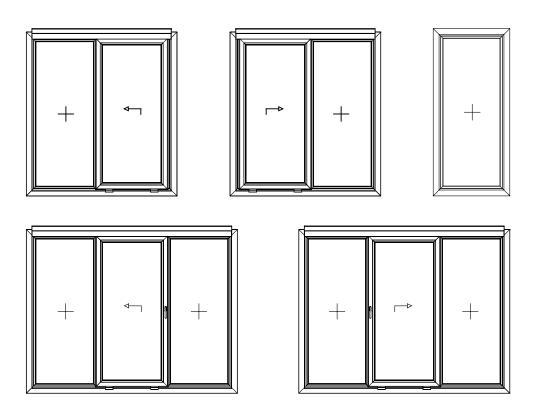

SAMPLE DRAWING

